




E.S. GLOBAL TOP

**Power Connectors –
Product Portfolio**



Contents

- Corporate info.
- CRPS Power Card Edge
- Low Profile Hybrid Power
- High Power Card Edge
- Hybrid Power Card Edge AC to DC
- Power Blade
- Bus Bar Clip
- High Flow Power
- Backplane Power
- Quality & Reliability Guaranteed

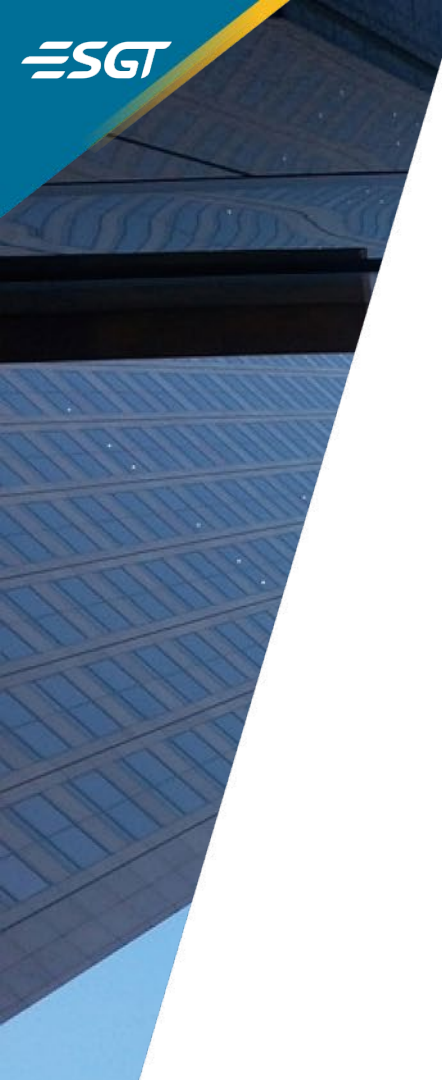

Corporate Info.

Year of founding: 2008
Registry No.: 28926684
Capital: NT\$10 million

Locations:



Office:
Taoyuan Dist.,
Taoyuan City,
Taiwan



Warehouse:
Pingzhen Dist.,
Taoyuan City,
Taiwan


Banking info

Bank: First Commercial Bank West Chung Li Branch
Account No.: #282-40-007534
Address: No.30, Chung Yan West Road Sec. 2, Chung Li Dist.,
Taoyuan City 320 Taiwan
Swift Code: CBKWTWP



CRPS Power Card Edge


- **Current rating**
12.5A per pin
- **Pin counts**
4~72 pins
- **Pitch**
2.54mm
- **Types**
DIP, press fit & straddle

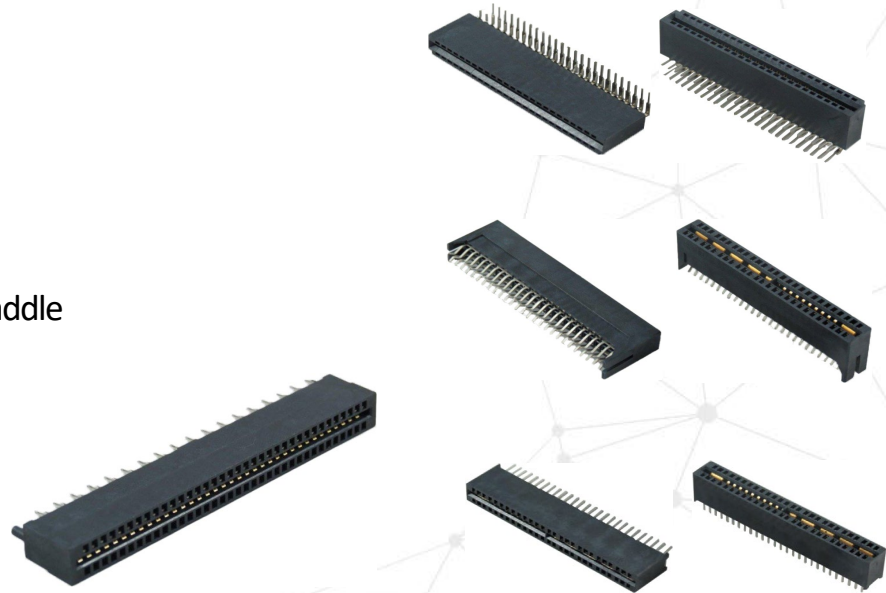




Low Profile Hybrid Power


- **Current rating**
power pin: 45~60A
signal pin: 1A
- **Pin counts**
power: 4~8 pins
signal: 0~24 pins
- **Types**
DIP & press fit
- **Height**
standard: 4.1mm
extra: 9.2mm
offset: 0.6mm, 1.85mm & 8.15mm

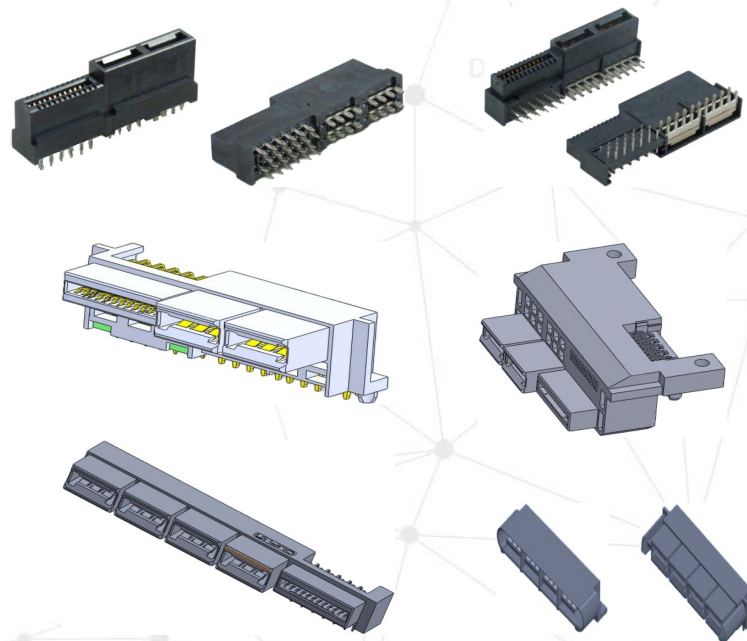


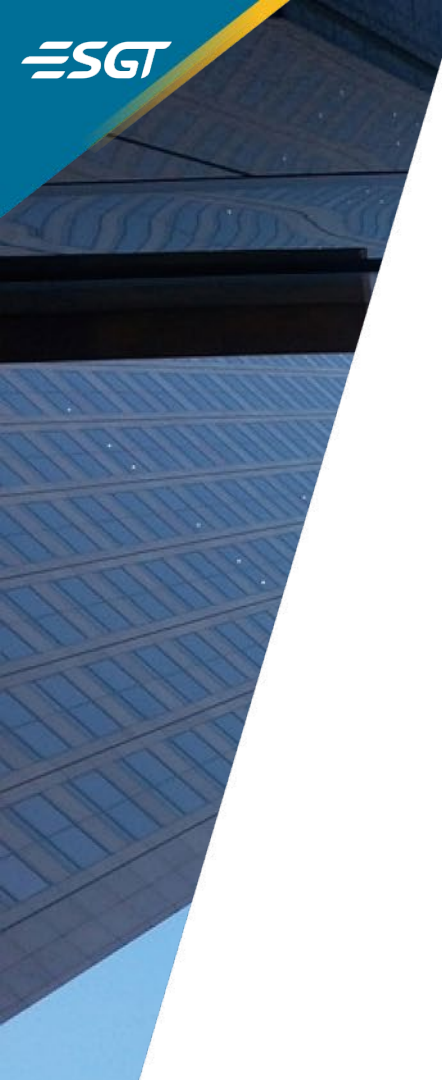

High Power Card Edge


- **Current rating**
power pin: 12.5A
signal pin: 1.5A
- **Pin counts**
power: 4~48 pins
signal: 8~24 pins
- **Types**
DIP, press fit & straddle

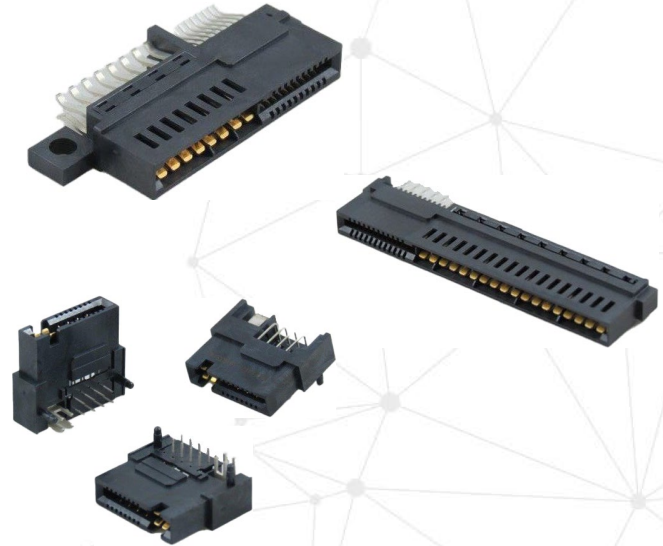


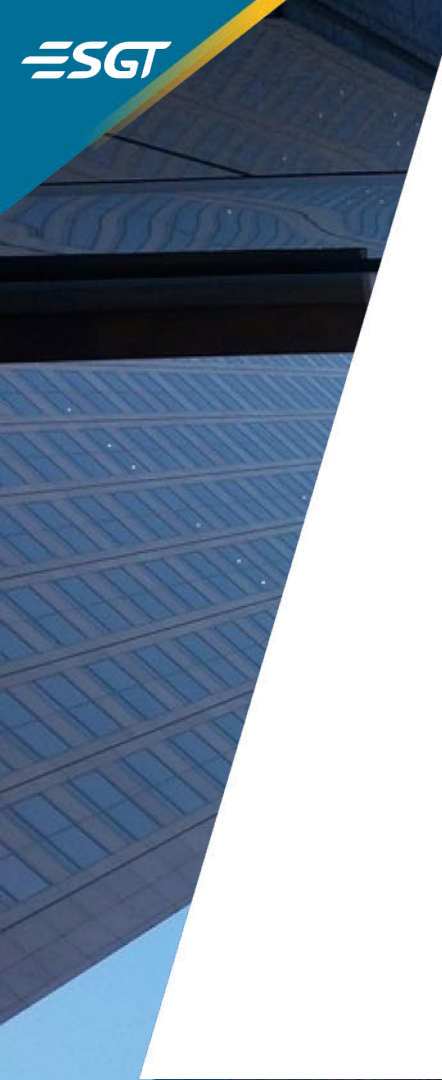

Hybrid Power Card Edge AC to DC


- **Current rating**
power pin: 18A AC, 60A DC
signal pin: 1A
- **Pin counts**
power: 4~12 pins
signal: 10~12 pins
- **Types**
right angle: DIP & press fit
vertical: press fit

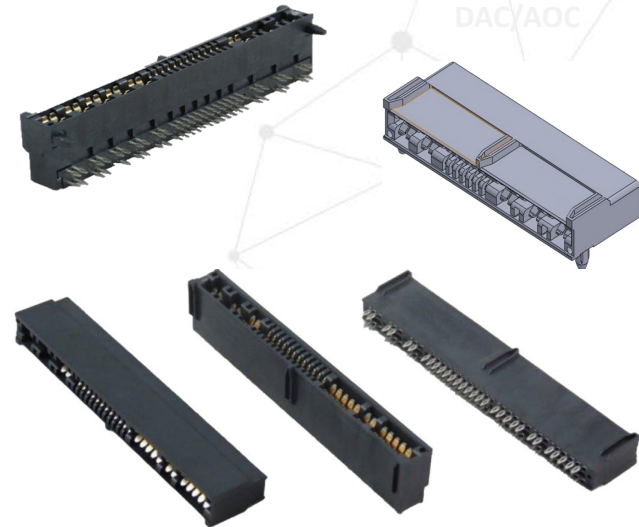

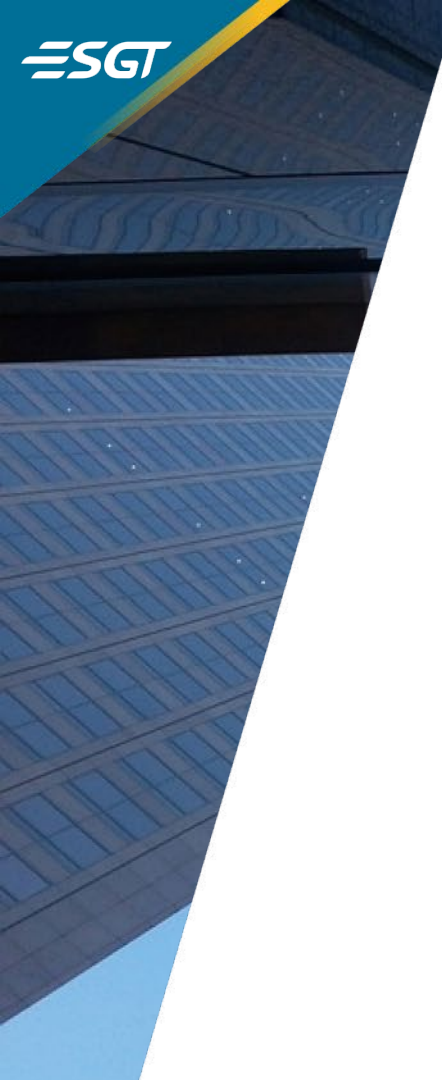

Power Blade

- **Current rating**
power pin: 30A
signal pin: 2.5A
- **Pin counts**
power: 2~11 pins
signal: 0~64 pins
- **Types**
DIP & press fit (for vertical)

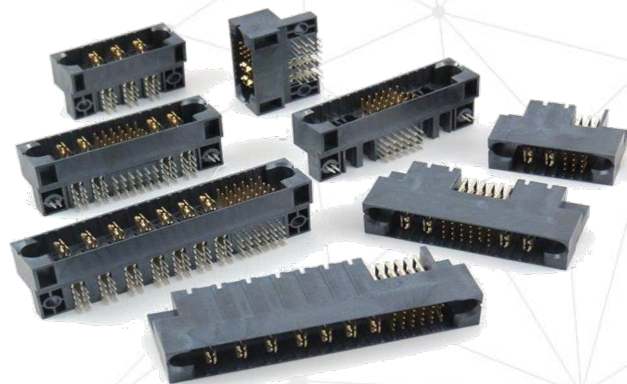



Power Blade+

- **Current rating**
power pin: 65A
signal pin: 2.5A
- **Pin counts**
power: 2~11 pins
signal: 0~64 pins
- **Types**
DIP & press fit (for vertical)
- **Power supply**
AC in, DC out
DC in, DC out




DAC/AOC

Bus Bar Clip



- **Current rating**
 - high current: 150A
 - high voltage: 16A/400V
- **Bus bar thickness**
 - high current: $3\pm 0.10\text{mm}$
 - high voltage: $5\pm 0.15\text{mm}$
- **Types**
 - high current: DIP with screws
 - high voltage: DIP




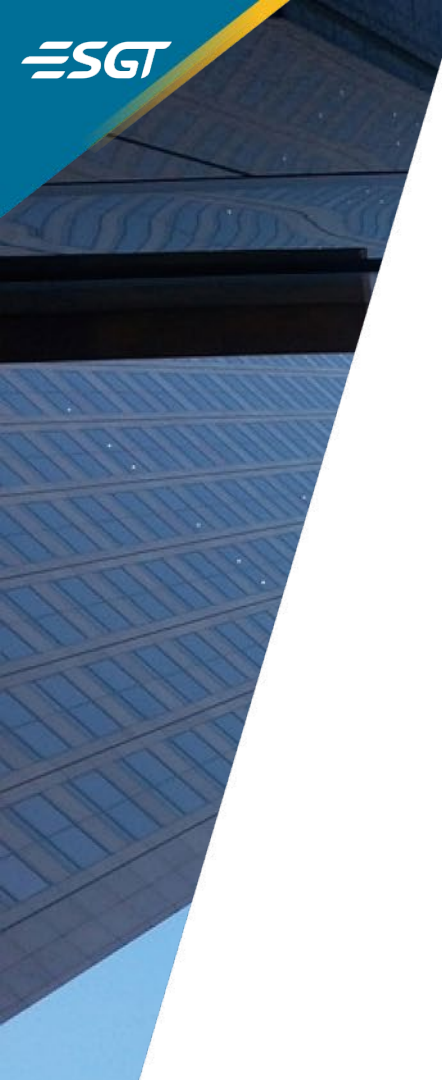

High Flow Power

- **Current rating**
150A
- **Types**
DIP for right angle & vertical

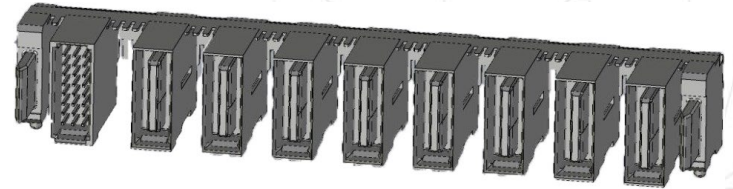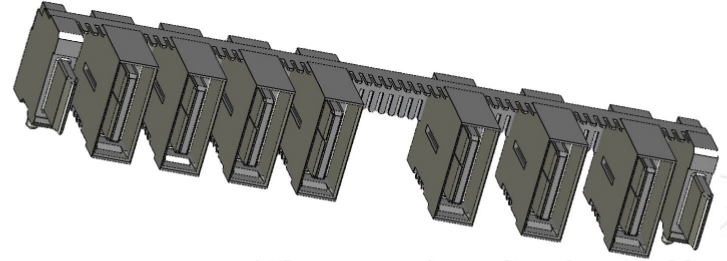

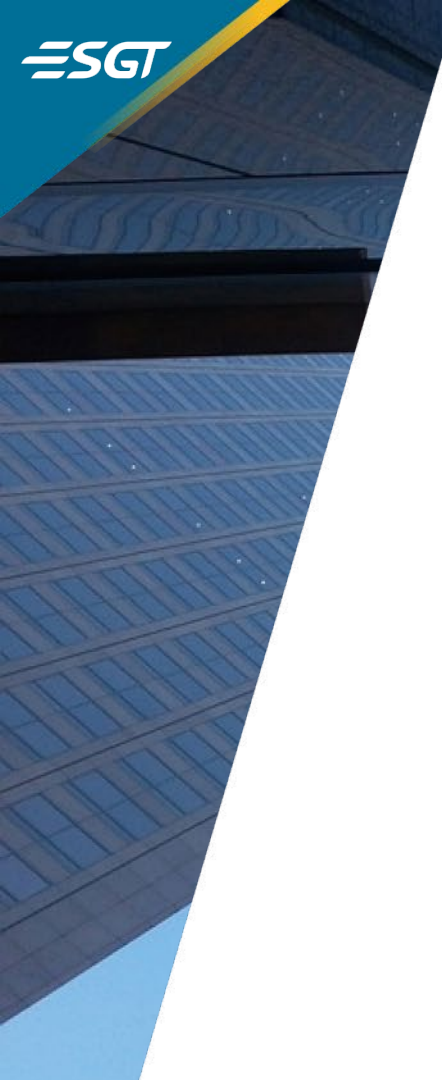

Backplane Power

- **Current rating**
65A
- **Pin count**
2 pins
- **Types**
press fit for right angle





Quality & Reliability Guaranteed

Temp. &
Humidity

Thermal Shock
Resistance

Bending Test

Insulation
Resistance

Withstanding
Voltage

LLCR
Measurement



Salt Spray Test

Durability &
Force

Coating
Thickness

High
Frequency Test

Halogen Free

RoHS & REACH
Compliance

The logo for ESGT, featuring the letters 'ESGT' in a bold, white, sans-serif font. The 'E' is stylized with three horizontal bars. The background of the logo area is a dark blue diagonal band.

ESGT

The main title of the company, 'E.S. GLOBAL TOP' in white italicized font, followed by 'E.S. Global Top Technology Co., Ltd.' in a larger, bold, yellow font. The background is a dark blue diagonal band with a light blue geometric pattern of dots and lines.

E.S. GLOBAL TOP
E.S. Global Top Technology Co., Ltd.

website: www.esgt.com.tw
contact: seanchao@esgt.com.tw

