
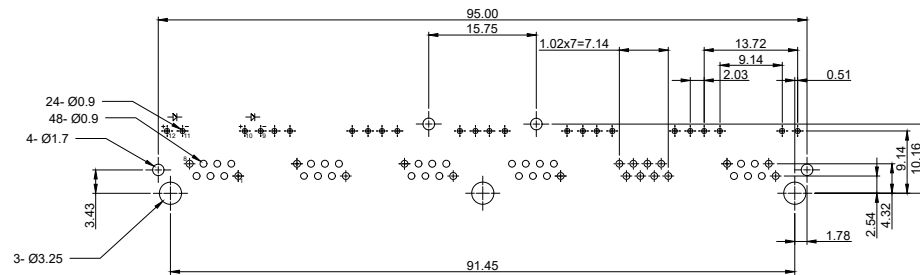


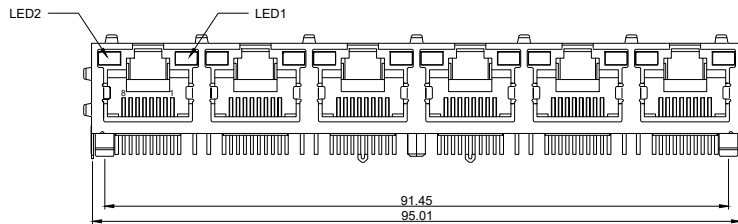


NOTES  
 HOUSING : PBT BLACK UL94V-0  
 CONTACT : PHOSPHOR BRONZE  
 SHIELD : H65Y NICKEL PLATING  
 PLATING : 30µ" GOLD PLATING AT CONTACT  
           AREA NICKEL PLATING OVERALL  
 DURABILITY : 750 CYCLES MIN.  
 MATING/UNMATING FORCE : 22N/2.27KG MAX.  
 RETENTION STRENGTH : 57.83N MIN.  
 VOLTAGE RATING : 125 VAC RMS  
 CURRENT RATING : 1.5 AMP  
 CONTACT RESISTANCE : 45 mΩ MAX.  
 INSULATION RESISTANCE : 1000 MΩ MIN. @500V DC  
 DIELECTRIC STRENGTH : 1000VAC RMS 60Hz ONE MINUTE  
 OPERATION TEMPERATURE : -40°C ~ +85°C

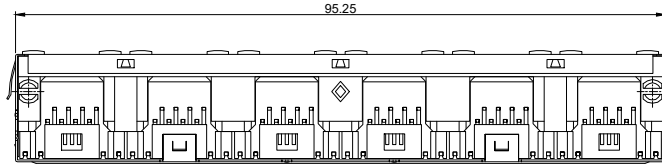

RECOMMENDED PCB LAYOUT

		UNIT	mm
		REVISION	04
PRODUCT		RJ45 1X6 SHIELDED WITH LED	
DWG NO.	EZC1145-68S21-01	PART NO.	
PROJECTION		SCALE	SHEET 1 OF 1
		TOLERANCES .x ± 0.25 .xx ± 0.20 .xxx ± 0.10 ANGLES ± 0.5	