



NOTES:
 CAGE : COPPER ALLOY NICKEL PLATED
 EMI SPRINGS : COPPER ALLOY NICKEL PLATED
 LIGHT PIPE : POLYCARBONATE TRANSPARENT
 OPERATION TEMPERATURE : -40°C~+85°C
 STORAGE TEMPERATURE : -55°C~+105°C

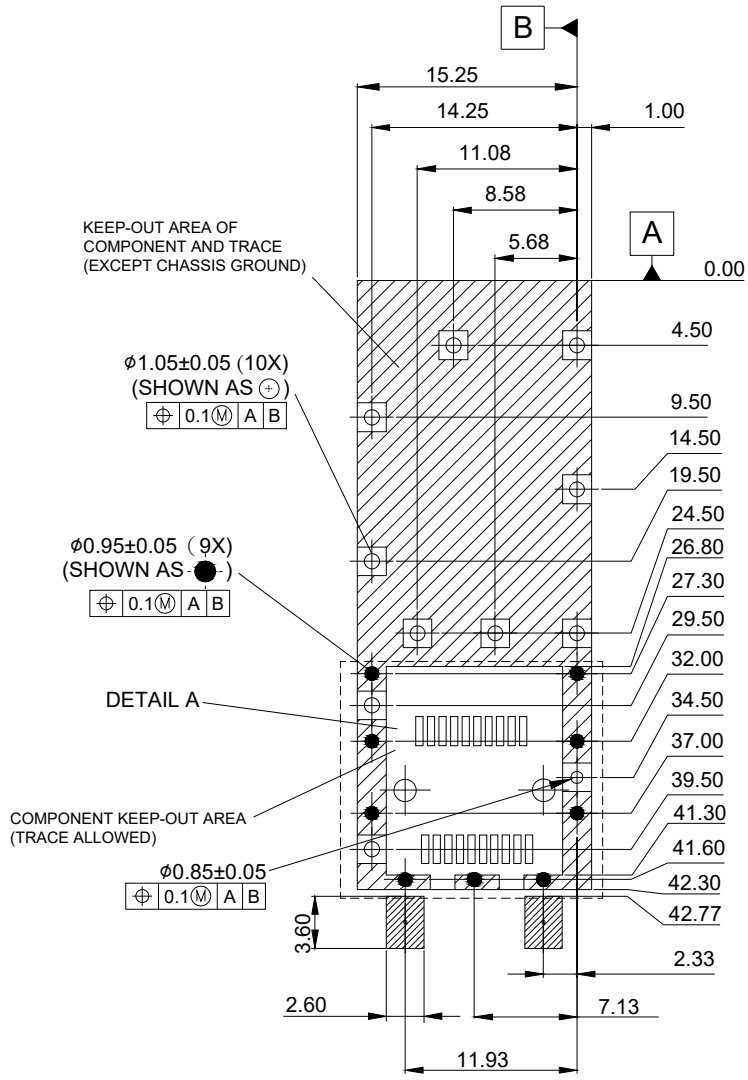

			UNIT	mm
			REVISION	G
PRODUCT			SFP Cage 1x1 with Light Pipe	
DWG NO.			PART NO.	
EZS-1N21-01				
PROJECTION	SCALE	SHEET		1 OF 2
			ANGLES ± 2°	

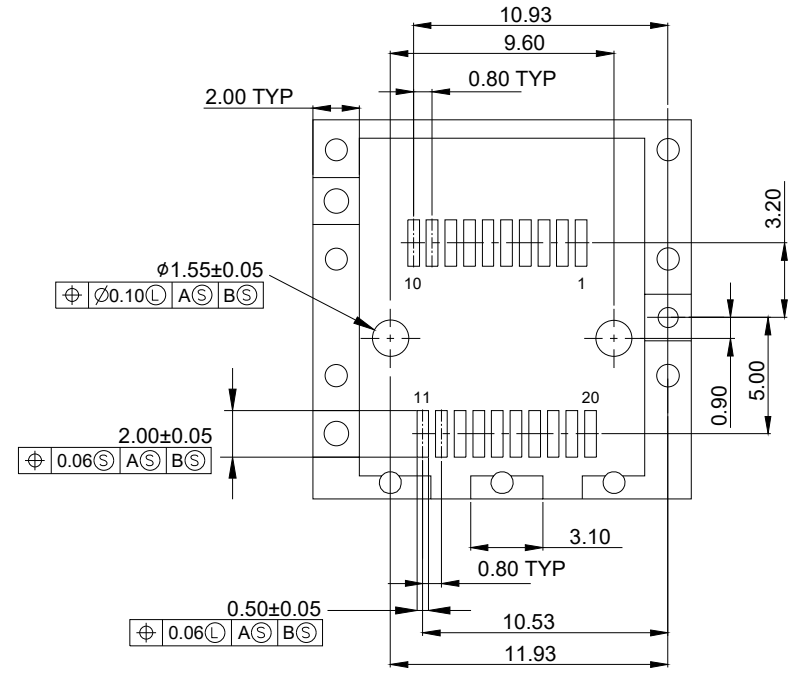

RECOMMENDED PCB LAYOUT
(PCB Thickness 1.60mm)



DETAIL A

 E.S. GLOBAL TOP			UNIT	mm
			REVISION	G
PRODUCT			SFP Cage 1X1 with Light Pipe	
DWG NO.		PART NO.		TOLERANCES
EZS-1N21-01				
PROJECTION	SCALE	SHEET		
		2 OF 2		.0 ± 0.25 .00 ± 0.13 .000 ± 0.10 ANGLES ± 2°